

# PICUS DUO

PICOSECOND LASER SOURCE FOR COHERENT RAMAN IMAGING

The **PICUS DUO** is the ideal laser source for multicolor CARS and SRS imaging. The turn-key **PICUS DUO** offers a compact footprint, no need for water cooling or an isolated table.

Wavelength conversion in an all-fiber optical parametric oscillator, pumped by a stable fiber laser provides an unmatched combination of tuning speed and tuning range.



## HIGHEST AVAILABLE TUNING SPEED

- Tunable in ms across 700 - 3100  $\text{cm}^{-1}$
- No external delay required
- Integrated spectrometer

## OPTIMIZED FOR CARS & SRS MICROSCOPY

- Stokes output shot-noise limited at 1 mA
- Optional integrated AM modulator (20, 10, 6 MHz)
- Balanced detector available (down to -170dBc/Hz)

## CARE-FREE OPERATION

- Plug & Play installation
- Hands- and maintenance-free operation
- Air-cooled & compact: 42x45x25  $\text{cm}^3$

## Applications

CRI with inter-image wavelength switching

Live virtual H&E contrast via CRI

Multicolor pump-probe experiments

Contact us for  
various  
customizations!

# Product Specifications

Optical	Output A	Output B
Tuning range	780 - 980 nm	1025 - 1055 nm
Tuning speed	< 100 ms	
Average power	100 - 250 mW	300 - 500 mW
Covered wavenumbers	700 - 3100 cm <sup>-1</sup> monitored with 0.1 cm <sup>-1</sup> precision	
Pulse duration	7 - 10 ps	2 - 3 ps
Spectral bandwidth	< 12 cm <sup>-1</sup>	
Repetition rate	~40.5 MHz	
Typical RIN noise Stokes at 20MHz	<-157dBc/Hz	
Integrated tunable delay	> 5 cm	

## Electrical


Interfaces	Communication through USB or RS232 Trigger in for high speed wavelength tuning Monitor out for external synchronisation
Software interfaces	GUI and custom serial API, e.g., via Python & Matlab

## Mechanical

Laser head (pump laser integrated)	42x45x25 cm <sup>3</sup>
Laser controller dimension	43x45x13 cm <sup>3</sup>
Cooling	Air-cooled
Weight	25 kg
Standard umbilical length	1.8 m

# Performance

## Typical long term stability

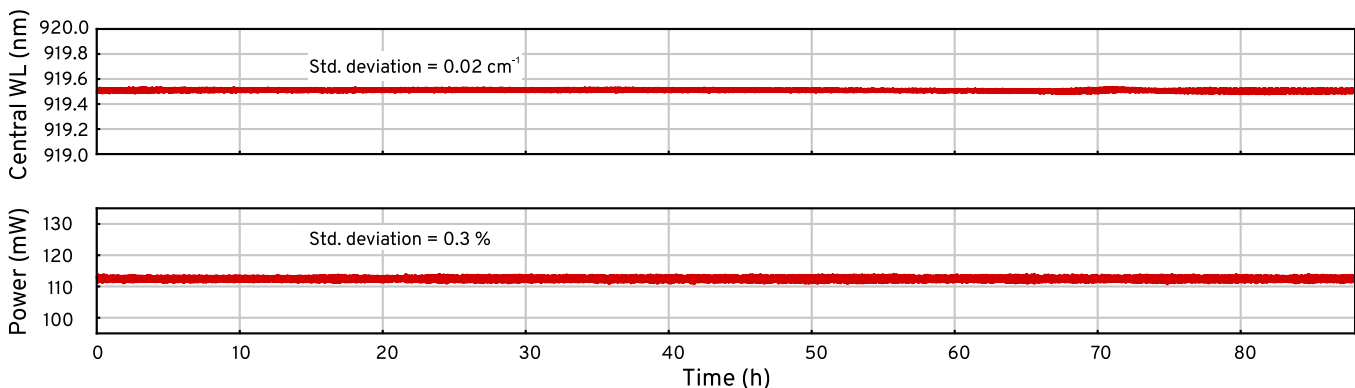

info@refined-lasers.com  
www.refined-lasers.com



Refined Laser Systems GmbH  
Mendelstrasse 11  
48149 Münster  
Germany

The product is constantly being improved, therefore the specifications are subject to change without notice. Jan 2023 | Rev. 4.0